

160mm

140mm

### Warranty and Contact Details

Assured to the users that under normal using of the products, there will be no defects that affect the use of the product due to craftsmanship and materials:

This warranty statement sets out the full and exclusive obligations of the product, and we will not delegate or authorize anyone to assume any other responsibilities related to the products we sell.

The product warranty is one year. The warranty period starts from the date of purchasing by the consumer. In order to determine the start date of the warranty, it is necessary to provide the purchasing certificates or other reasonable documents.

The following conditions are not covered by the warranty:

1. The appearance of the product is damaged after use;
2. Non-professional workers are not allowed to disassemble and repair without permission;
3. Product performance failure due to human reasons.
4. Damage caused by irresistible factors such as natural disasters, lightning, accidents, etc.

### Product parameter

battery capacity	AC Output	Type-C Input/Output	DC Input	DC Output	USB Output	Solar Input
1200W/1080Wh 30000mAh	100V <input type="checkbox"/> 120V <input type="checkbox"/> 220V <input type="checkbox"/> 230V <input type="checkbox"/>	In/Out1: PD100W Out2: PD100W	5~28V/6A	12~13V/10A	QC 3.0: 18W USB1&2: 10W	18V/6A

Cigar Lighter	wireless Output	weight	size	Operating temperature	Charging temperature	Warranty
12~13V/10A	15W	11.7Kg	338*247*245mm	-10°C~45°C	0°C~45°C	1 year

### Packing list



Portable Outdoor Mobile Power Station OPS1200




AC power adapter




Instruction Manual

## Portable Outdoor Power Station OPS1200

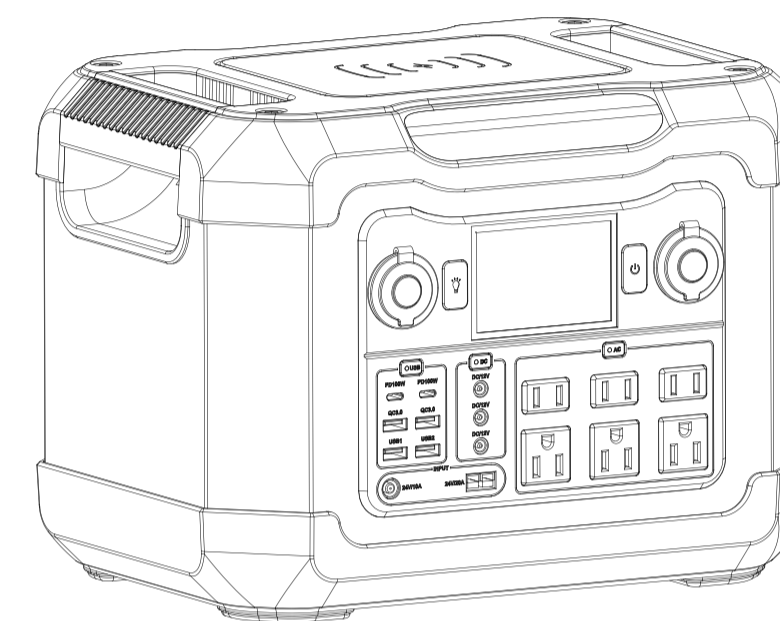

Instruction Manual

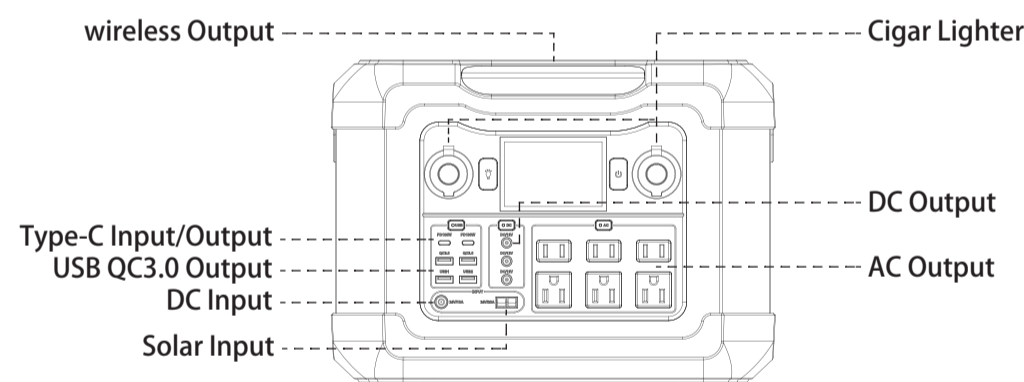

### Notice

1. Press the power button 3 seconds to turn on the Power Station, and the screen display is working.
2. Press the AC button again for 3 seconds, the screen display will show AC icon, which means AC output is Working. Press the AC button again for 3 seconds, the AC output is turned off.
3. Long press the light button to turn on the light, Continue press to Switch the lights until it is turned off.(Press One time for Camping, then press the light button to switch Weak Light/Strong Light/SOS/Flash Light)
4. Press the DC button, the indicator light is on, means the DC/cigarette lighter output is turned on, press again to turn off.
5. Press the USB button, the indicator light is on, USB1/USB2 QC3.0, USB3/USB4, Type-C1/Type-C2 PD100W, wireless charging output is turned on, press again to turn off.
6. Low temperature may affect the battery capacity of the product. The product can be charged in the temperature range of 0~40°C, and used for the equipment in the temperature range of -10~55°C.
7. It is recommended to fully charge the product for the first time to avoid inconvenience caused by insufficient power.

### Warnings and Notes

When using this product, you should always follow the basic precautions, including:

1. Read all instructions before using this product.
2. In order to reduce risk, when using this product in the vicinity of children, close oversight must be required
3. If the accessories recommended or sold by non-professional manufacturers, it may lead to the risk of electric shock.
4. When the product is not in used, please pull the power plug out of the product socket.
5. It is forbidden to use damaged wires or plugs, or damaged output cables to use the product. There is a risk of electric shock
6. Please charge the product in a well-ventilated place. Do not restrict the ventilation in any way
7. Please put the product in a ventilated and dry place to avoid Rain/Water wet, product with water has the risk of electric shock.
8. Do not expose the product to fire or temperature above 130°C, which may lead to fire, explosion and other safety accidents.
9. Prohibit to use or placement of products at high temperatures (in direct hot sunlight or in very hot cars), otherwise it maybe caused internal battery overheating, fire or functional failure, life reduction and other risks.
10. Please charge the product every three months to prevent electricity shortage.
11. When Power Station is lower power, it is recommended to hold it aside for half an hour before charging

### Questions

1. Can I take this product into the plane?

Cannot, because this product built-in lithium battery, according to the International Air Transport Standard Regulation, battery products can't be exceeded 100 Wh.

2. My Device in the product rated output power range but cannot be used?

Product electricity less than 20%, the mobile power station needs to be charged first.

3. Why do you hear slight noises when you used this product?

The product adopts air cooling system, the built-in fan helps the product to dissipate heat better, when using has the slight noise to belong to the normal phenomenon.

4. Is it normal that the charger gets hot while charging?

Charger gets heating is a normal phenomenon when charging, the chargers meets safety standards, you could rest assured to use!